


REVOLVING CENTER / LIVE CENTER



- Manufactured from high grade steel hardened point to impart extra strength.
- Hardened & Ground Steel With 60° Tip Angle.
- Recommended for use upto 1500 r.p.m.

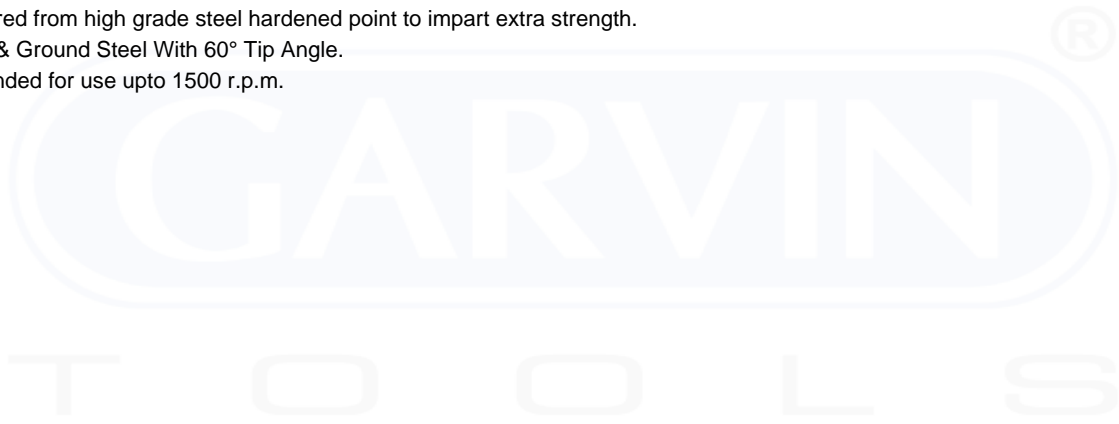

Cat. No.	Morse Taper	Body Diameter		Point Diameter		Overall Length	
		Inch	mm	Inch	mm	Inch	mm
GRC-7878	MT - 1	1-5/16	34	11/16	18	4-3/4	120
GRC-7879	MT - 2	1-37/64	40	27/32	21	5-7/8	148
GRC-7880	MT - 3	2-5/16	60	15/16	24	7-1/4	185
GRC-7881	MT - 4	2-1/2	63	1-1/8	28	8-5/8	220
GRC-7882	MT - 5	3	75	1-1/2	36	10-1/4	260
GRC-7883	MT - 6	4	100	2-1/8	53	14	355

