


## HSS BORING BARS



- Ground Shank on Underside to Provide a Flat Surface for Ease of Setting to Ensure Rigidity When used in Tool Post
- Manufactured from M2 Grade

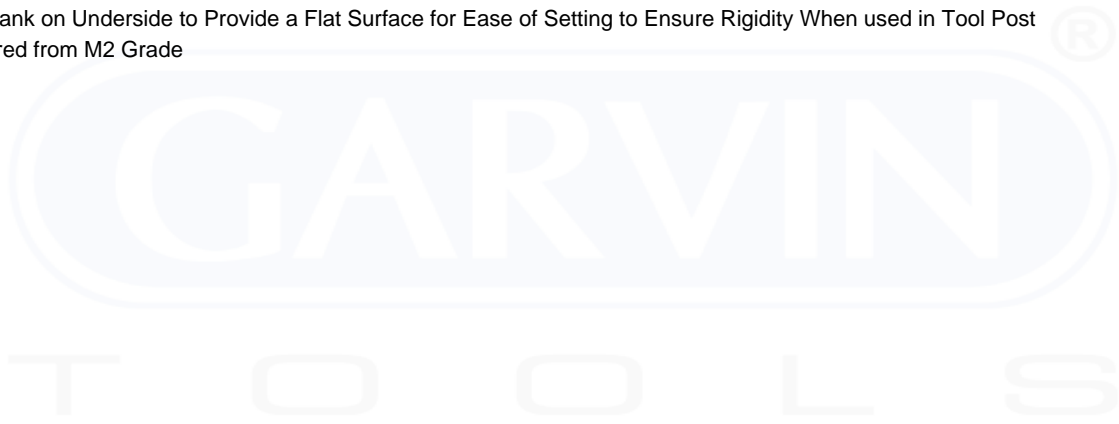

Cat No.	Diameter	O.A.L
GBB-7663	5mm (3/16")	114mm (4-1/2")
GBB-7664	6mm (1/4")	127mm (5")
GBB-7665	8mm (5/16")	153mm (6")
GBB-7666	9.5mm (3/8")	178mm (7")



[www.garvintools.com](http://www.garvintools.com)